

**FRONTIER
MEDICAL SCREENS
UNI 9175 CLASSE 1 IM
CERTIFICATE**



01733 511030
sales@xldisplays.co.uk



LAPI LABORATORIO PREVENZIONE INCENDI s.p.a.
I-59100 PRATO - Loc. La Querce - Via della Quercia, 11
Tel. +39 0574 575320 - Fax +39 0574 575323
e . m a i l : l a p i @ l a b o r a t o r i o l a p i . i t
w e b s i t e : w w w . l a b o r a t o r i o l a p i . i t

- ORGANISMO NOTIFICATO IN CONFORMITÀ A REGOLAMENTO PRODOTTI DA COSTRUZIONE 3052/2011/EU
- ORGANISMO NOTIFICATO IN CONFORMITÀ A DISPOSITIVI DI PROTEZIONE INDIVIDUALE DIR. 89/686/CEE
- ORGANISMO NOTIFICATO DIRETTIVA EQUIPAGGIAMENTI MARITTIMI 2014/90/EU
- MEMBRO EGULF e UNIFER
- RICONOSCIUTO USCG ADMINISTRATION
- RICONOSCIUTO CERTIFIER
- RICONOSCIUTO ITALCERTIFER
- CERTIFICATO REGISTRO AERONAUTICO ENAC CIT 1013/L
- AUTORIZZAZIONE MINISTERO INTERNO D.M. 28/03/85
- ACCREDITATO ACCREDIA N.0086 - EN 17025
- RICONOSCIUTO DIR. 2014/90/EU MARINE EQUIPMENT - BUREAU VERITAS - DMV-GL - LLOYD'S REGISTER
- PROVE SU AUTOREICOLI AI SENSI DELLA DIRETTIVA 99/28 CE E REG. 118
- AUTORIZZATO BHF-CALIFORNIA, CARB CALIFORNIA, CPSC USA
- AUTORIZZATO VWF SVIZZERA E EBA GERMANIA

Spettabile

CAMIRA FABRICS Ltd
Meltham Mills, Meltham, Huddersfield,
West Yorkshire, HD9 4AY (United Kingdom)

Prato, 23/10/2018
Rif. 2036/18/AC



In riferimento alle Vs. richieste, Vi rimettiamo in allegato ns. Rapporto di Prova in doppia lingua (italiano/inglese), contenente i risultati della prova effettuata su Vs. materiale:

With reference to your order, please find enclosed our Test Report in double language (italian/english), containing the results of the test effected on your material:

Denominazione commerciale Trade name	Metodo di prova Test method	Rif. Laboratorio Laboratory Ref.
VITA (C) Nom. weight of the material: 850 g/m ²	UNI 9175: 2010 Reazione al fuoco mobili imbottiti Reaction to fire of upholstered products	2309/18

Nota: Prova effettuata su ipotesi di mobile imbottito (Tessuto fornito dal Richiedente + Imbottitura fornita dal Laboratorio).

Note: Test effected on a upholstered piece of furniture hypothesis (Fabric supplied by the Sponsor + Filling supplied by the Laboratory).

Distinti saluti,
Best Regards

LAPI S.p.A.



RAPPORTO DI PROVA NO. 2309.0UN0101/18

Test Report no.

METODO DI PROVA:

UNI 9175: 2010

Test method

DENOMINAZIONE DELLA PROVA:

Reazione al fuoco mobili imbottiti

Description of the standard

Reaction to fire of upholstered products

RICHIEDENTE:

CAMIRA FABRICS Ltd

Sponsor

Meltham Mills, Meltham, Huddersfield,
West Yorkshire, HD9 4AY (United Kingdom)

DENOMINAZIONE DEL MATERIALE:

VITA (C)

Denomination of the material

PESO NOM. E COLORE DEL MATERIALE:

850 g/m² - Americano

Nom. weight and colour of the material

DATA RICEVIMENTO CAMPIONI:

09/10/2018

Date of the samples receipt

Nota: Prova effettuata su ipotesi di mobile imbottito (Tessuto fornito dal Richiedente + Imbottitura fornita dal Laboratorio).

Note: Test effected on a upholstered piece of furniture hypothesis (Fabric supplied by the Sponsor + Filling supplied by the Laboratory).

- Questo Rapporto di Prova è costituito da / This Test Report consists of:
 - no. 5 pagine (compresa la presente) / no. 5 pages (including this one).
 - no. 2 allegati / no. 2 annexes.

I risultati riportati in questo Rapporto di Prova si riferiscono esclusivamente al materiale sottoposto a prova fornito dal Richiedente (Rif. codice Laboratorio no. 2309/18). Un campione del materiale è stato conservato dal Laboratorio.

The results reported in this Test Report refer exclusively to the material submitted to test and supplied by the Sponsor (Ref. Laboratory code no. 2309/18). A sample of the material has been retained by the Laboratory.

- Questo Rapporto di Prova, valido esclusivamente per il materiale provato, rispetta metodi e procedure previsti all'art. 3 del D.M. 26.06.84 come modificato dal D.M. 03.09.01.

This Test Report is valid solely for the material tested and is in compliance with methods and procedures prescribed by art. 3 of D.M. 26.06.84 as modified by D.M. 03.09.01.

Non è rilasciato ai sensi degli art. 8 e 10 del D.M. 26.06.84 e D.M. 03.09.01

It is not issued according to art. 8 and 10 of D.M. 26.06.84 and D.M. 03.09.01

Il D.M. 03.09.2001 pubblicato nella G.U.R.I. serie generale n.242 del 17 Ottobre 2001 modifica ed integra il precedente D.M. 26.06.84.

The D.M. 03.09.2001 published in G.U.R.I. serie generale n.242 of 17 October 2001 amends the preceding D.M. 26.06.84.

Prato, 23/10/2018

Il Direttore del Laboratorio

The Director of the Laboratory

Dr. Luca Ermiani

Rapporto di Prova no. **2309.0UN0101/18**
Test Report no.

METODO DI PROVA / TEST METHOD
UNI 9175

Materiale / Material:

COMPONENTE COMPONENT	N. SERIE PROVETTE SPECIMENS SERIES N.	ESITO PROVE PER I VARI TEMPI DI INNESCO (IN SECONDI) TEST RESULT FOR THE APPLIED IGNITION TIMES (SECONDS)		
materiale imbottito filling	20	POSITIVO / POSITIVE (0 s postcomb. / afterflame time)	80	140
	2°	POSITIVO / POSITIVE (0 s postcomb. / afterflame time)		
	1°	POSITIVO / POSITIVE (0 s postcomb. / afterflame time)		
manufatto completo complete item	2°	POSITIVO / POSITIVE (0 s postcomb. / afterflame time)		
	1°	POSITIVO / POSITIVE (0 s postcomb. / afterflame time)		
	2°	POSITIVO / POSITIVE (0 s postcomb. / afterflame time)		
1°	POSITIVO / POSITIVE (0 s postcomb. / afterflame time)			
				POSITIVO / POSITIVE (0 s postcomb. / afterflame time)

Metodo di preparazione UNI 9176: D
Method of preparation UNI 9176: D

CLASSE / CLASS
1 IM

Note / Notes:

- Lato esposto : indicato dal Richiedente.
- Side exposed : indicated by Sponsor.
- L'IMBOTTITURA IMPIEGATA DAL LABORATORIO, E' COSTITUITA DA UNA SCHIUMA POLIURETANICA ESPANSA FR, CON DENSITA' 35 kg/m³, DI CLASSE 1IM.
- THE FILLING USED HAS BEEN SUPPLIED BY THE LABORATORY; IT IS MADE OF AN EXPANDED POLYURETHANE FLAME RETARDANT FLEXIBLE FOAM, WITH DENSITY 35 kg/m³, BELONGING TO CLASS 1IM.

QUESTO RAPPORTO DI PROVA RISPETTA METODI E PROCEDURE PREVISTI ALL'ART. 3 DEL D.M. 26.06.1984 COME MODIFICATO DAL D.M. 03.09.2001.

THIS TEST REPORT IS IN COMPLIANCE WITH METHODS AND PROCEDURES PRESCRIBED BY ART. 3 OF D.M. 26.06.1984 AS MODIFIED BY D.M. 03.09.2001.

IASPI

S.p.A. LABORATORIO PREVENZIONE INCENDI
Legalmente riconosciuto - Autorizzato dal Ministero dell'Interno

Lugogo e data prova
Place and test date
Prato, 22/10/2018



DESCRIZIONE DEL MATERIALE

Description of the material

Aspetto: tessuto spalmato di colore marrone.

Appearance: coated fabric of brown colour.

Composizione (*): Superficie : 98.5% Base PVC - 1.5% Spalmatura PU.

Substrato: 50% Poliestere lavorato a maglia - 50% Supporto in cotone.

Composition (): Surface: 98.5% PVC base - 1.5% PU Coating.*

Substrate: 50% Knitted poly - 50% Cotton backing.

Campione anisotropo / Anisotropic specimen (*) - Colore / Colour (*): Americano

Spessore nominale / Nom. thickness (*): 1.2 mm. - Peso nominale / Nominal weight (*): 850 g/m².

Lato esposto (*): indicato dal Richiedente (faccia con etichetta).

Side exposed (): Indicated by the Sponsor (face labelled).*

Impiego / End use (*): sedute / seating.

(*) - Informazioni fornite dal Richiedente / Information supplied by the Sponsor.

DESCRIZIONE DELLA PROCEDURA DI CAMPIONAMENTO

Description of the sampling procedure

Il campionamento del prodotto è stato effettuato a cura del Richiedente dal lotto di produzione n° D9079 c/o lo stabilimento di CAMIRA FABRICS Ltd sito in Meltham Mills, Meltham, Huddersfield, West Yorkshire, HD9 4AY (United Kingdom), in data 03 Ottobre 2018 (Vedi dichiarazione allegata).

Il Laboratorio non è stato coinvolto in alcuna operazione di campionamento della produzione.

The sampling of the product has been effected by the Sponsor from the production batch n° D9079 c/o the factory of CAMIRA FABRICS Ltd sited in Meltham Mills, Meltham, Huddersfield, West Yorkshire, HD9 4AY (United Kingdom), on 03rd October 2018 (See declaration annexed).

The Laboratory has not been involved in any sampling procedure of the material from the production.

PREPARAZIONE E CONDIZIONAMENTO

Preparation and Conditioning

Il materiale è stato sottoposto al metodo di preparazione UNI 9176: D

Il materiale è stato condizionato come prescritto dal metodo applicato.

The material has been submitted to the preparation method UNI 9176: D

The material has been conditioned before testing as prescribed by the method in object.

Il Direttore del Laboratorio
The Director of the Laboratory

Dr. Luca Ferraris



PROCEDIMENTO DI PROVA

Test Procedure

La prova è stata eseguita secondo il metodo **UNI 9175**.

L'imbobitura impiegata, fornita dal Laboratorio è costituita da una schiuma poliuretana espansa FR, con densità 30 kg/m³ (Elast 30 della ditta Olmo S.p.A.), di CLASSE 1 IM.

L'imbobitura è stata sottoposta a (80±5)°C e (80±5)% U.R. per 72 ore, dopo le quali è stata condizionata in atmosfera standard a (23±2)°C e (50±5)% U.R. per più di 48 ore prima della prova.

*The test has been carried out according to the method **UNI 9175**.*

The filling used has been supplied by the Laboratory and consists of an expanded polyurethane flame retardant flexible foam, with density 30 kg/m³ (Elast 30 by Olmo S.p.A.), belonging to CLASS 1 IM.

The filling has been stored for 72 hours at (80±5)°C and (80±5)% R.H., after which period it has been conditioned in standard atmosphere at (23±2)°C and (50±5)% R.H. for more than 48 hours.

LUOGO E DATA DI SVOLGIMENTO DELL'ATTIVITÀ DI PROVA

Place and test date

L'attività di prova è stata effettuata in data 22/10/2018 presso la sede principale del Laboratorio

(Via della Quercia, 11 - Prato).

The test has been effected on date 22/10/2018 c/o the principal place of the Laboratory

(Via della Quercia, 11 - Prato).

VALUTAZIONE / JUDGEMENT

Sulla base dei risultati ottenuti e relativamente ai campioni forniti dal Richiedente, al materiale in esame è attribuibile la

On the basis of the obtained results and referring to the samples supplied by the Sponsor, the material is assigned to

CLASSE / CLASS - 1 IM -

di reazione al fuoco / of reaction to fire.

INCERTEZZA DI MISURA

Uncertainty of measurement

Non applicabile / Not applicable.

Il Direttore del Laboratorio
The Director of the Laboratory



Dr. Luca Emme

Foto / Photos

Campione / Specimen 1

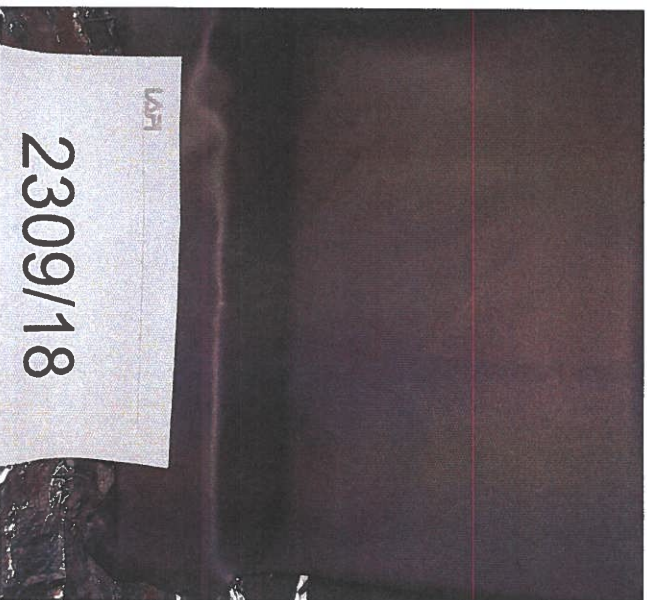


Foto 1: prima della prova / Picture 1: before testing

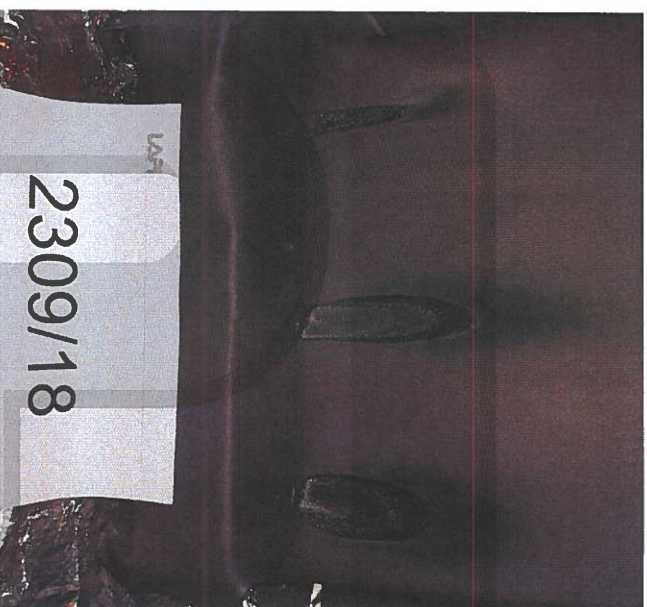


Foto 2: dopo la prova / Picture 2: after testing

Campione / Specimen 2

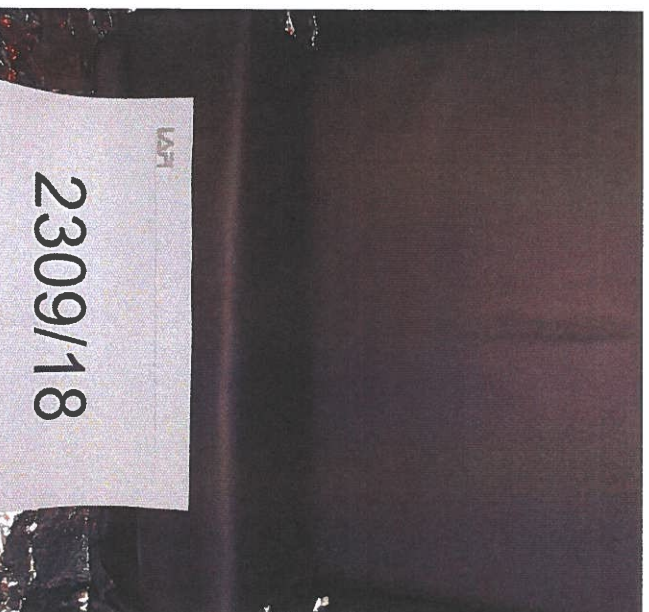


Foto 3: prima della prova / Picture 3: before testing

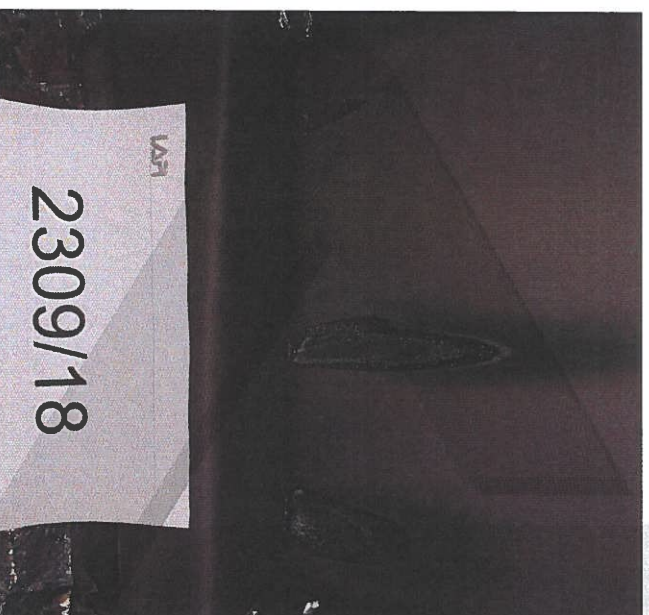


Foto 4: dopo la prova / Picture 4: after testing

Il Direttore del Laboratorio

The Director of the Laboratory


Dr. Luca Ermi



Responsible Person to contact :

Vally Longstaffe

Page 1/2



TEST REQUEST HEADING (full address): *CAMIERA FABRICS LTD
METHUEN MILLS / ADA LAY*

INVOICE HEADING (full address): *CAMIERA FABRICS LTD
HOPTON MILLS, HIRFIELD, WILTSHIRE*

COMMERCIAL NAME OF THE ARTICLE ²⁾:

Vita (c)

Technical data of the specimen ²⁾; (see annexed sheet for stratified and composite materials)

Composition (%): *48.5% PVC (surface) 1.5% RS Backing (Base) Witted Poly Cotton 50% 50% (Substrate)*

Appearance: *—* Colour: *Americano*

Thickness (mm): *1.2mm* Weight (g/m²): *850* g/m² Density (kg/m³):

Possible fire retardant treatment: *←*

The specimen is Isotropic Anisotropic

The specimen usually composes a side in view (Yes/No): *NO*

The two sides are identical (Yes/No): *NO*

If the two sides are not identical, identify which of the two must be tested:

face labelled

End use of the article: (CURTAIN, WALL, FLOOR, CEILINGS, etc...) *seating*

Laying of the article (if stuck specify the type of glue g/m²): *N/A*

REQUESTED TESTS ON THE SPECIMEN: ^{3) 5)} *UNI 9175* IN ACCORDANCE TO SPEC. N. ³⁾ *UNI 9175*. REQUEST FOR MEASUREMENT UNCERTAINTY (ANNEXED TO THE TEST REPORT ⁶⁾): YES NO

NOTES ON THE SPECIMEN (POSSIBLE DEROGATIONS³⁾):

TO BE FILLED ONLY IN CASE OF TRANSPORTATION FIELD TESTS:

SAFETY DATA SHEET	N°.....	Date.....
TECHNICAL DATA SHEET	N°.....	
BATCH	N°.....	Date.....

Stamp and signature of Responsible

Date *26/10/18*

Notes (to be read to fill this form):

- 1) The commercial name of the article represents the exact name that will be written on the Test Report . It has to be univocal and match exactly to possible names written on the specimen. L.A.P.I. reserves itself the right to not accept specimen whose identification is unclear or ambiguous.
- 2) Technical data reported below will be written on the Test Report as indicated by the reference specification. The side to be tested has to be clearly identified, marking it in a suitable way if possible.
- 3) List the tests to perform and their reference methods. If the tests have the purpose to verify the matching of a specimen to a specification, it is useful to mention it in this field and to enclose a copy of the specification. If not specified, we assume the request refers to the latest valid edition of the specification. Indicate in this field possible derogations to the method or supplementary procedures to apply during the test. Every derogation and/or supplementary procedure will be referred and described on the Test Report. In methods expecting a preliminary treatment of the specimen, indicate only if you don't want those treatments to be performed on the sample.
- 4) In case UNI EN ISO 3386 "Resistance to compression of low density materials" has to be effected, the material has to be sent to the Laboratory not before 72 hours from its production.
- 5) The evaluation performed by the Laboratory does not involve the approval of the product neither by the Laboratory nor by the Accreditation Body. Moreover, the mark of the Accreditation Body or any reference to the accreditation of the Laboratory shall not be used by the Customer in any way, and in particular shall not be reported in the product documentation on the product itself. A copy of the Test Report can be attached.
- 6) The Responsibility of LAPI SPA is limited to the value of the activities regarding tests requested
- 7) In case LAPI can not finish the tests for technical reasons attributable to LAPI SPA, tests will not be charged and no recourse in terms of additional costs will be due in respect of LAPI SPA
- 8) LAPI SPA submitted to test a prototype and LAPI is not responsible. In the event of a negative result of the test, of the previous marketing in case of non-compliance.
- 9) The customer / Producer, (who presents and signs the request to perform the laboratory tests) if does not properly and clearly explicit in the data sheets any safety risks arising from simple handling, conditioning as a result of thermal cycling or destructive tests laboratory on of their own material, is responsible for any damage to people, equipment and property.
- 10) In case of witness to test (when allowed) LAPI is exempted from any responsibility for accidents and damages to people and things could happen during testing due to the material under testing.
- 11) The "Declaration of Measure uncertainty" will be annexed to the Test Report if the test method is under ACCREDIA accreditation and includes a Declaration of conformity.
- 12) Following the acceptance of costs proposed, cancellation of the order involves the payment of 30% of the cost of the test for practice management cost coverage.
- 13) In case of difference of trade names reported in the Tests Request and Sampling modules, the name reported in the Test Request will be considered predominant.



A) MANUFACTURER: CAMIRA FABRICS LTD .

B) COMMERCIAL NAME:
VITA (c)

C) DESCRIPTION OF THE MATERIAL:

Surface - 98.5% PVC Base, 1.5% PU coating.
Substrate - Knitted poly/cotton Baseing 50/50".

1) nature of components: ...%.....
Warp% N° THREADS/ cm
Weft% N° THREADS/ cm

2) format: h ... 140 cm

the material is isotropic/anisotropic with two sides-equal/different
processing:

3) weight: g/mq

D) COMPLEX OF DIFFERENT COMPONENT:

E) LAYING: HUNG, SUSCEPTIBLE TO CATCHING FIRE ON SIDE ONLY.

F) APPLICATION: CURTAINS, DROP CURTAINS, DRAPES

G) MAINTENANCE: metod A UNI 9176/98

Date, 26/10/18

Firm (Legal Representative)

A handwritten signature in black ink.

FAC-SIMIL MODEL



TO BE COMPILED ON COMPANY'S HEADED PAPER

The undersigned

.....
Vahy Longstaff.....

in ~~his~~/her capacity of legal representative of the Company Camira Fabrics LTD
declares that the sampling named Vita (e).....

and sent to be tested

was taken from the production batch n°

.....
D9079.....

c/o the factory CAMIRA FABRICS / MEITHAM MILLS
(indicate the address)

on (day): 3 (month: October (year: 2018 ,

safety sheet n° (to be annexed with stamping).....

technical data sheet n° (to be annexed with stamping).....

Date, 26/10/18.....

Signature

.....
Vahy Longstaff.....

NOTE: IF THE REQUIRED DATA WERE NOT AVAILABLE, SUPPLY AS MANY
DETAILS AS POSSIBLE IN ORDER TO IDENTIFY THE MATERIAL THE SAMPLING
WAS TAKEN FROM