

HOW TO MEASURE YOUR DESK FOR A DESK SCREEN

For Single Tool Rail Desk Screen

To ensure that the desk screen you order fixes to your desk correctly it is important that you measure your desk accurately. This guide is for our Single Tool Rail Desk Screens in the Premium Acoustic and Glazed Desk Screen Ranges.

The standard clamp we supply with our desk screens is a 'C' shaped clamp and adjusts to fit desks which are 18-32mm thick. This clamp need a clearance of 30mm on top and underneath the desk.


The clamps for our single tool rail desk screens can be attached anywhere along the bottom of the screen so it is easy to avoid obstacles, such as leg brackets, as the clamp can be moved along the screen to a more suitable position.

However, if your desk is more than 32mm thick, or obstacles cannot be avoided by moving the clamps along the screen, then please contact us on **01733 511030** for other clamp options. Please note, there may be a charge for substitute clamps.



01733 511030
sales@xldisplays.co.uk


CLAMP DIMENSIONS:

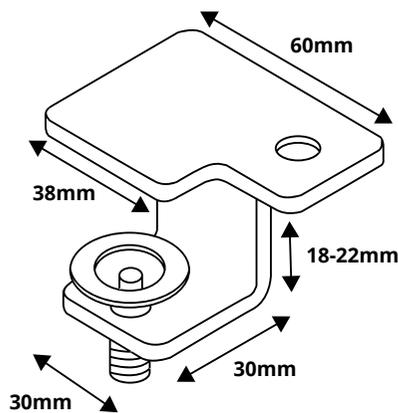

DESK MEASUREMENTS

Please provide measurements for sections **A**, **B (1&2)** and **C**.

For assistance call us on **01733 511030**

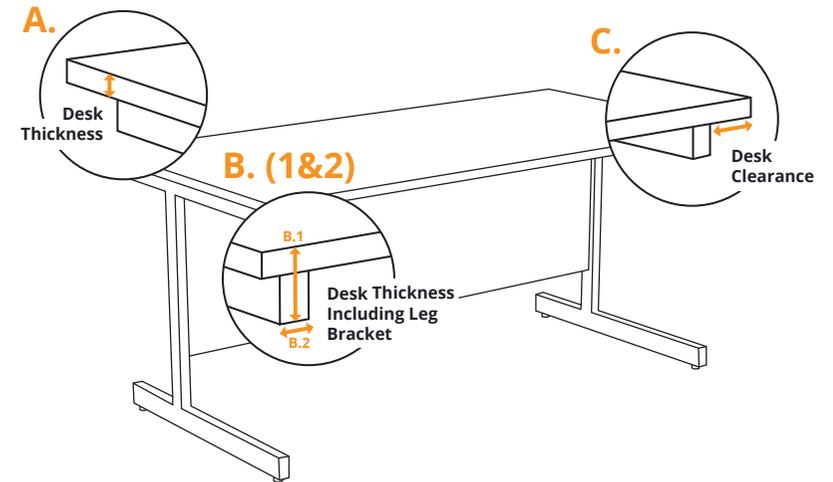

CLAMP POSITION:

Single Tool Rail Desk Screens can be mounted anywhere along your desk as long as the thickness is no more than 30mm. If there is an obstruction, simply move the clamp along to a more suitable area.

For This Example:


There is an obstruction of a leg bracket along the desk which exceeds the maximum clamp opening. Therefore the clamps will need moving to a more suitable location in order to mount the screen securely.

Back View of Desk - Ensure No Obstructions

1000mm and Above



Mountable anywhere along the base of the screen

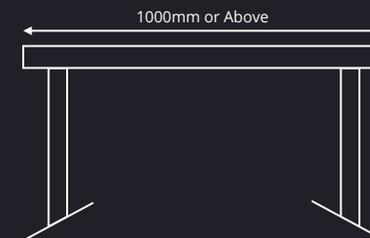

Side View Of Desk

1000mm or Below



Mountable anywhere along the base of the screen

